

Audiovisuelle Dateiformate

Reto Kromer • AV Preservation by reto.ch

Open Source im Archivalltag
Staatsarchiv Aargau, 20. August 2024

1

Inhalt

- digitaler Ton und digitales Bild
- Container, Codec, Rohdaten
- verschiedene Formate für unterschiedliche Zwecke
- audiovisuelle Dateiumwandlungen


2

Digitaler Ton


3

Frank Gray
(1887–1969)


4

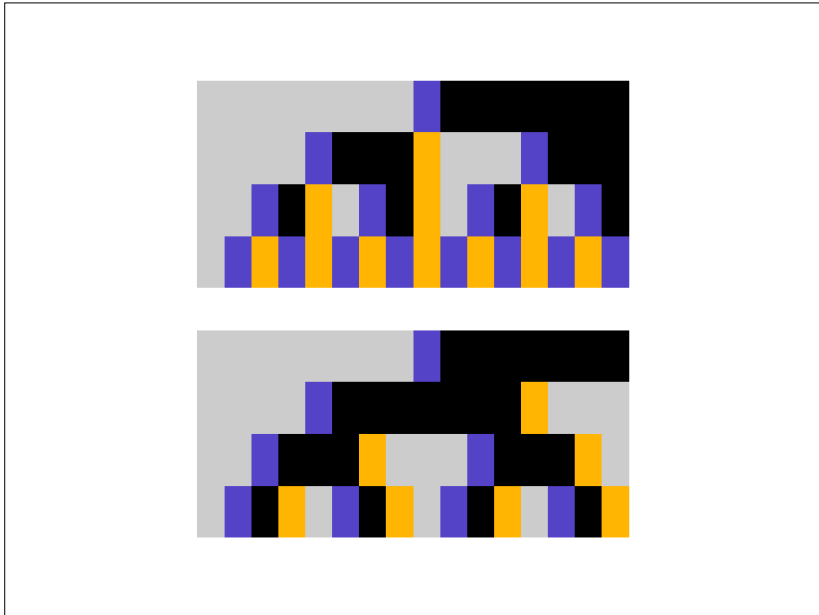

5

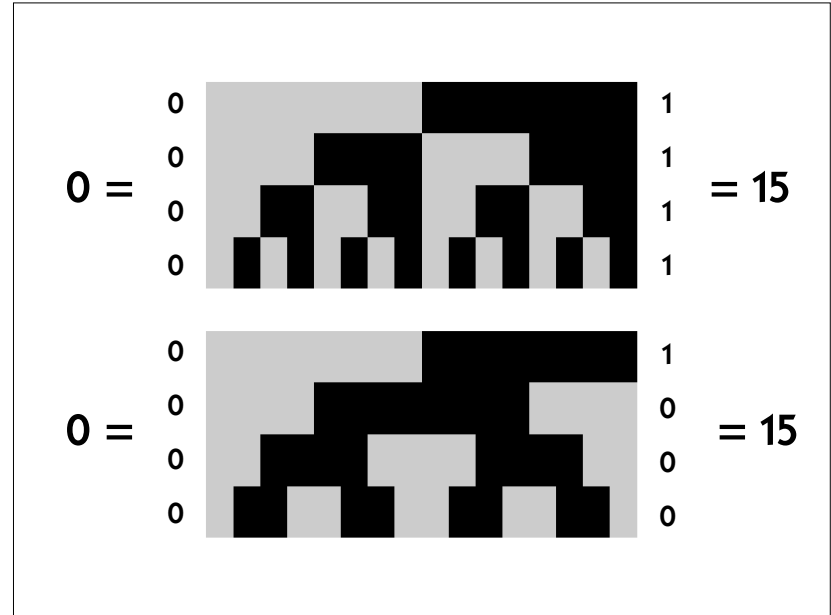

6

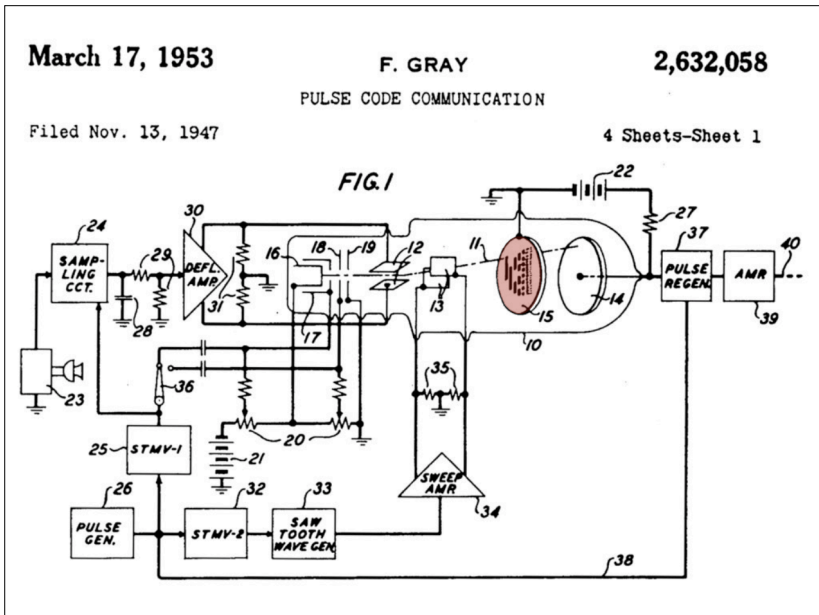


7

Digitaler Ton

- Abtastung
- Quantisierung
- Kompression

8

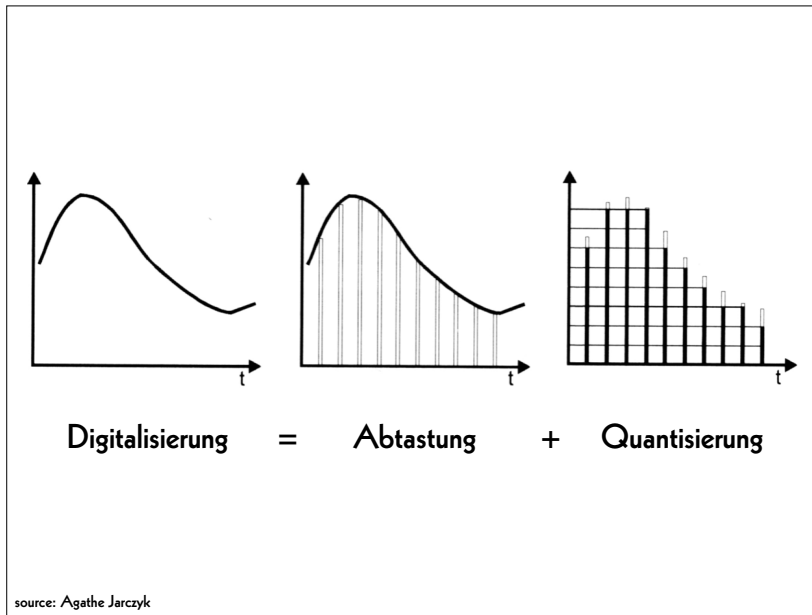

9

Abtastung

- 44.1 kHz
- 48 kHz
- 96 kHz
- 192 kHz
- 500 kHz

10

Quantisierung

- 16 bit ($2^{16} = 65\,536$)
- 24 bit ($2^{24} = 16\,777\,216$)
- 32 bit ($2^{32} = 4\,294\,967\,296$)

11

Digitales Bild

12

Digitales Bild

- Auflösung
- Quantisierungsauflösung
- linear, Potenzfunktion, logarithmisch
- Farbraum
- Kompression und Farbunterabtastung
- Normlicht

13

Auflösung

- SD 480i / SD 576i
- HD 720p / HD 1080i
- 2K / HD 1080p
- 4K / UHD-1
- 8K / UHD-2

14

Quantisierungsauflösung

- 8 bit ($2^8 = 256$)
- 10 bit ($2^{10} = 1\ 024$)
- 12 bit ($2^{12} = 4\ 096$)
- 16 bit ($2^{16} = 65\ 536$)
- 24 bit ($2^{24} = 16\ 777\ 216$)


15

Linear, Potenz, Logarithmus

«Mittelgrau»

- lineare Funktion: etwa 18 %
- Potenzfunktion: 50 %
- Logarithmusfunktion: 50 %

16

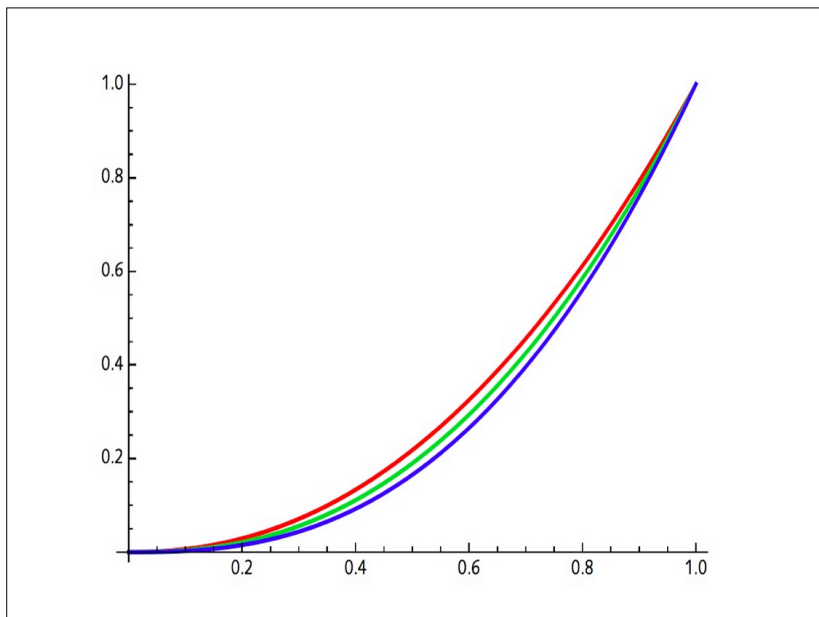


17


Farbraum

- XYZ, $L^*a^*b^*$
- RGB / R'G'B' / CMY / C'M'Y'
- Y'IQ / Y'UV / Y'D_BD_R
- Y'C_BC_R / Y'CoC_G
- Y'P_BP_R

18

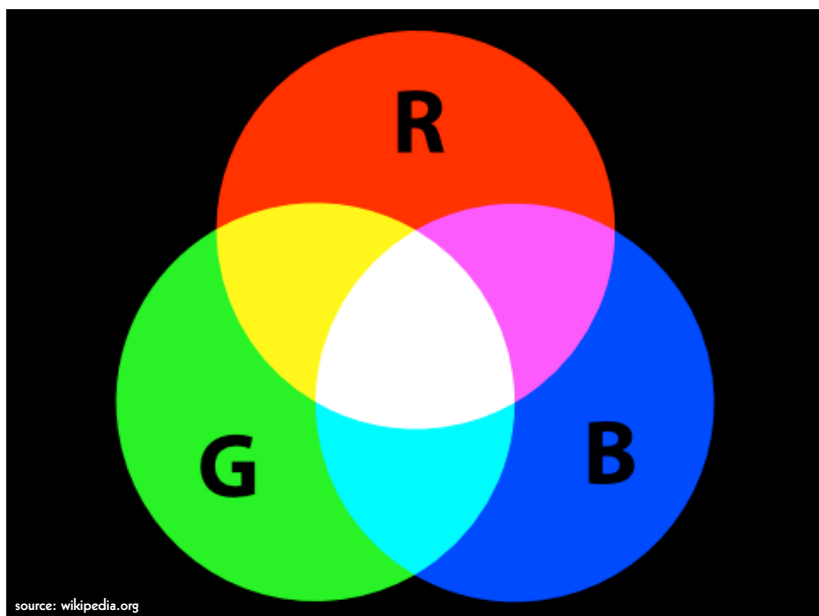

19

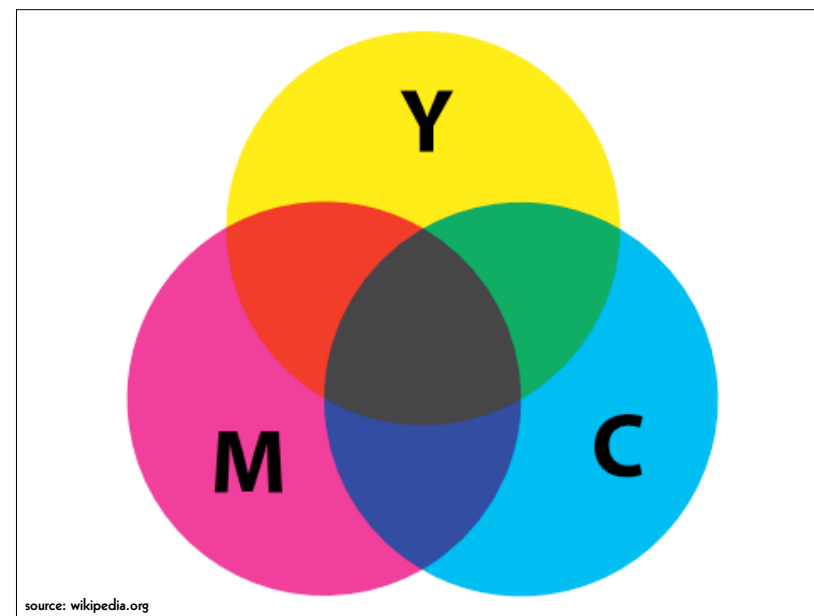

20

$$\begin{pmatrix} R' \\ G' \\ B' \end{pmatrix} = \begin{pmatrix} 1 & 0 & 1.396523 \\ 1 & -0.342793 & -0.711348 \\ 1 & 1.765078 & 0 \end{pmatrix} \begin{pmatrix} Y' \\ C_B \\ C_R \end{pmatrix}$$

$$\begin{pmatrix} Y' \\ C_B \\ C_R \end{pmatrix} = \begin{pmatrix} 0.299 & 0.587 & 0.114 \\ -0.168074 & -0.329965 & 0.498039 \\ 0.498039 & -0.417947 & -0.080992 \end{pmatrix} \begin{pmatrix} R' \\ G' \\ B' \end{pmatrix}$$

21


$$\begin{pmatrix} R' \\ G' \\ B' \end{pmatrix} = \begin{pmatrix} 1 & 1 & -1 \\ 1 & 0 & 1 \\ 1 & -1 & -1 \end{pmatrix} \begin{pmatrix} Y' \\ C_O \\ C_G \end{pmatrix}$$

$$\begin{pmatrix} Y' \\ C_O \\ C_G \end{pmatrix} = \begin{pmatrix} \frac{1}{4} & \frac{1}{2} & \frac{1}{4} \\ \frac{1}{2} & 0 & -\frac{1}{2} \\ -\frac{1}{4} & \frac{1}{2} & -\frac{1}{4} \end{pmatrix} \begin{pmatrix} R' \\ G' \\ B' \end{pmatrix}$$


22




23

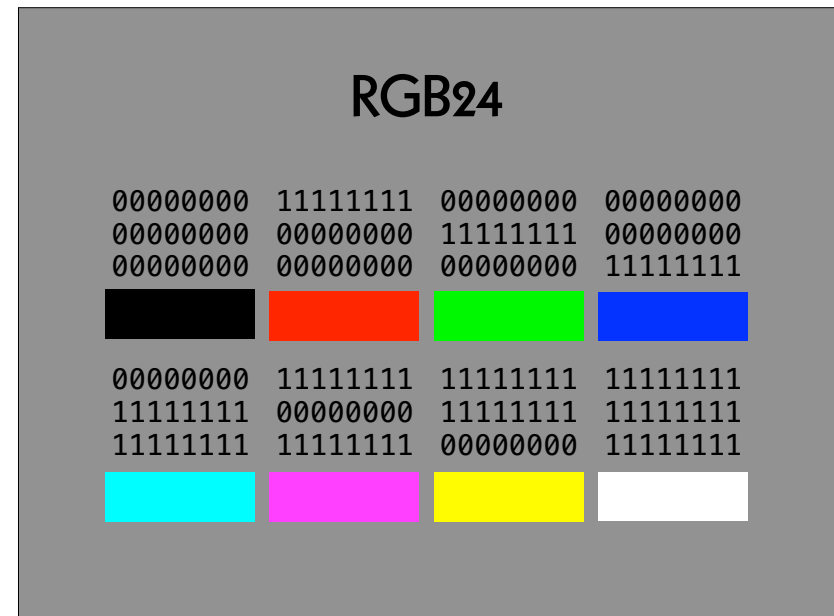

24

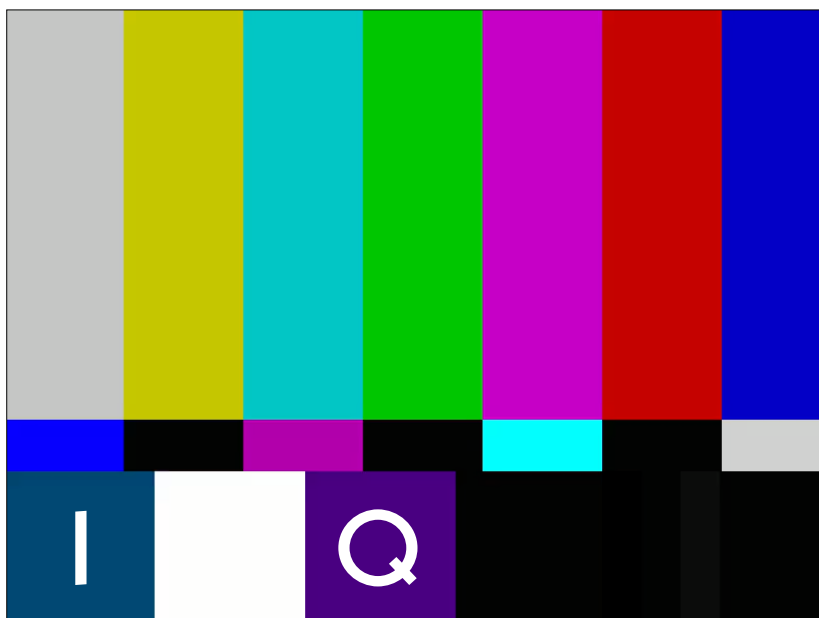

25

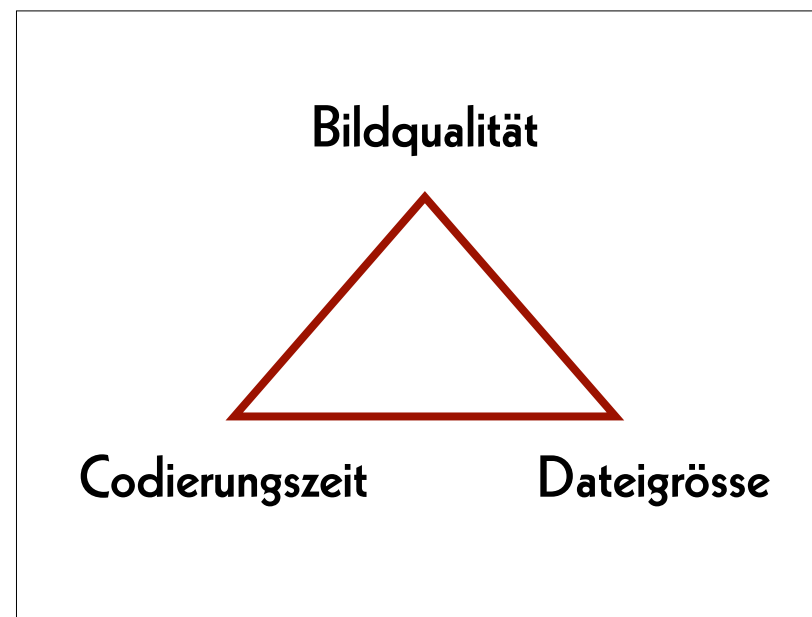

26

Kompression

- nicht komprimiert
- verlustfrei komprimiert
- verlustbehaftet komprimiert
- Farunterabtastung
- komprimiert generiert

27

Nicht komprimiert

- + Daten sind leichter zu bearbeiten
- + Software läuft schneller
- grössere Dateien
- langsames Schreiben, Übermitteln und Lesen der Dateien

Beispiele: TIFF, DPX, DNG, OpenEXR

28

Verlustfrei komprimiert

- + kleinere Dateien
- + schnelleres Schreiben, Übermitteln und Lesen der Dateien
- Daten sind komplexer zu bearbeiten
- Software läuft langsamer

Beispiele: JPEG 2000, FFV1

29

Verlustbehaftet komprimiert

- optimiert für Aufnahme und/oder Postproduktion
- optimiert für Zugang und Distribution

Beispiele (Mezzanine): ProRes 422, ProRes 4444; DNxHD, DNxHR

Beispiele (Zugang): H.264 (AVC), H.265 (HEVC), H.266 (VVC); AV1


30

Farbunterabtastung

- 4:4:4
- 4:2:2
- 4:2:0 / 4:1:1


31

4:4:4

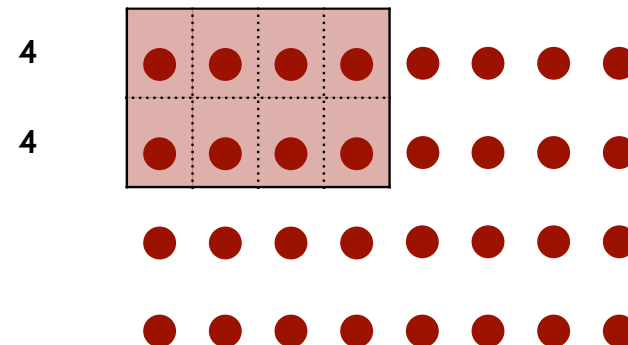


32

4:2:2

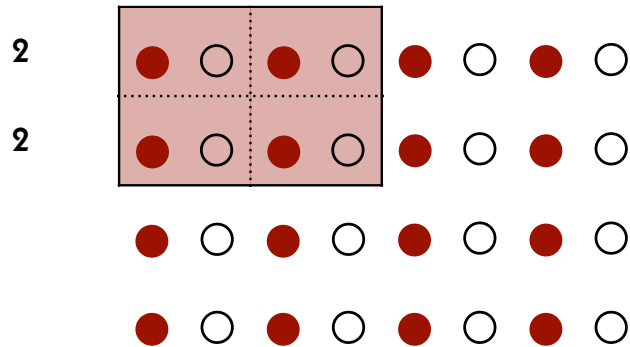


33

4:2:0

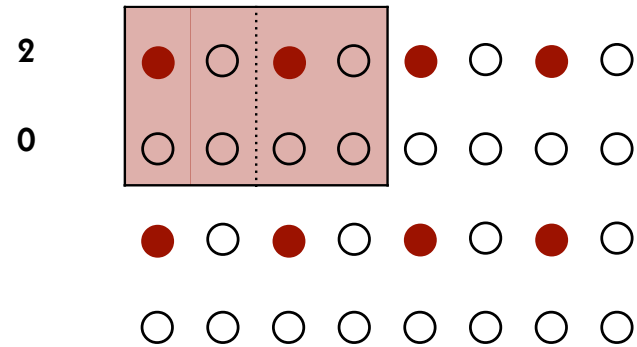

34

4:1:1

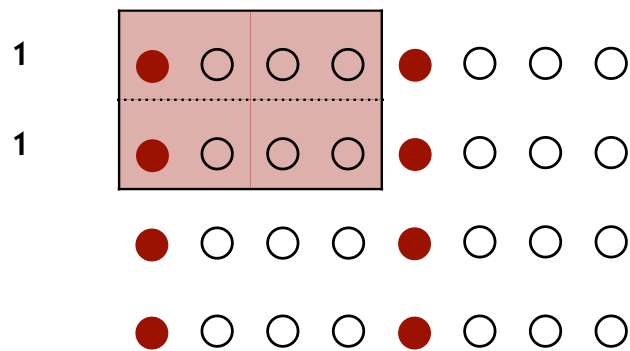

35

Komprimiert generiert

- sowohl für Aufnahme als auch für Postproduktion optimiert

Beispiele: CineForm RAW, ProRes RAW, Blackmagic RAW

36

Unbequeme Tatsachen

- Sensoren sind farbenblind
- Bayer-Sensoren erzeugen kein vollständiges RGB-Bild

37

Bryce E. Bayer (1929–2012)

38

United States Patent [19] Bayer

[11] 3,971,065
[45] July 20, 1976

[54] COLOR IMAGING ARRAY

[75] Inventor: Bryce E. Bayer, Rochester, N.Y.

[73] Assignee: Eastman Kodak Company,
Rochester, N.Y.

[22] Filed: Mar. 5, 1975

[21] Appl. No.: 555,477

[52] U.S. Cl. 358/41; 350/162 SF;
350/317; 358/44

[51] Int. Cl.² H04N 9/24

[58] Field of Search 358/44, 45, 46, 47,
358/48; 350/317, 162 SF; 315/169 TV

[56] References Cited

UNITED STATES PATENTS

2,446,791	8/1948	Schroeder.....	358/44
2,508,267	5/1950	Kasperowicz.....	358/44
2,884,483	4/1959	Ehrenhaft et al.....	358/44
3,725,572	4/1973	Kurokawa et al.....	358/46

Primary Examiner—George H. Libman

Attorney, Agent, or Firm—George E. Grosser


11 Claims, 10 Drawing Figures

[57] ABSTRACT

A sensing array for color imaging includes individual luminance- and chrominance-sensitive elements that are so intermixed that each type of element (i.e., according to sensitivity characteristics) occurs in a repeated pattern with luminance elements dominating the array. Preferably, luminance elements occur at every other element position to provide a relatively high frequency sampling pattern which is uniform in two perpendicular directions (e.g., horizontal and vertical). The chrominance patterns are interlaid therewith and fill the remaining element positions to provide relatively lower frequencies of sampling.


In a presently preferred implementation, a mosaic of selectively transmissive filters is superposed in registration with a solid state imaging array having a broad range of light sensitivity, the distribution of filter types in the mosaic being in accordance with the above-described patterns.

39

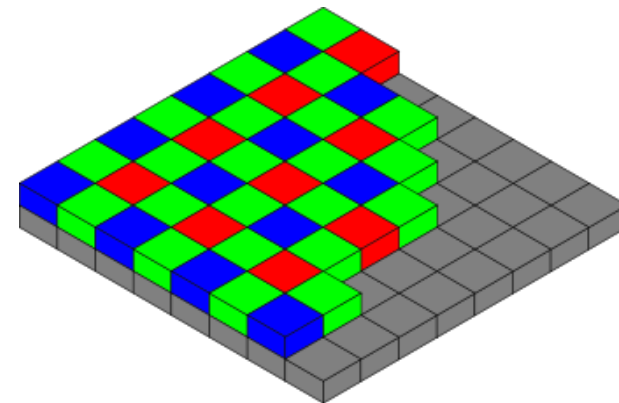


source: wikipedia.org

40

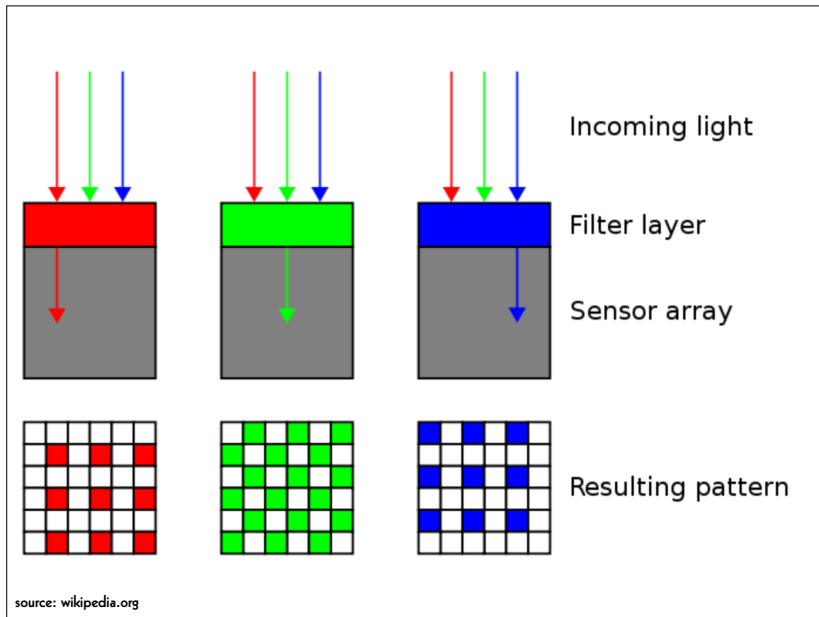

41

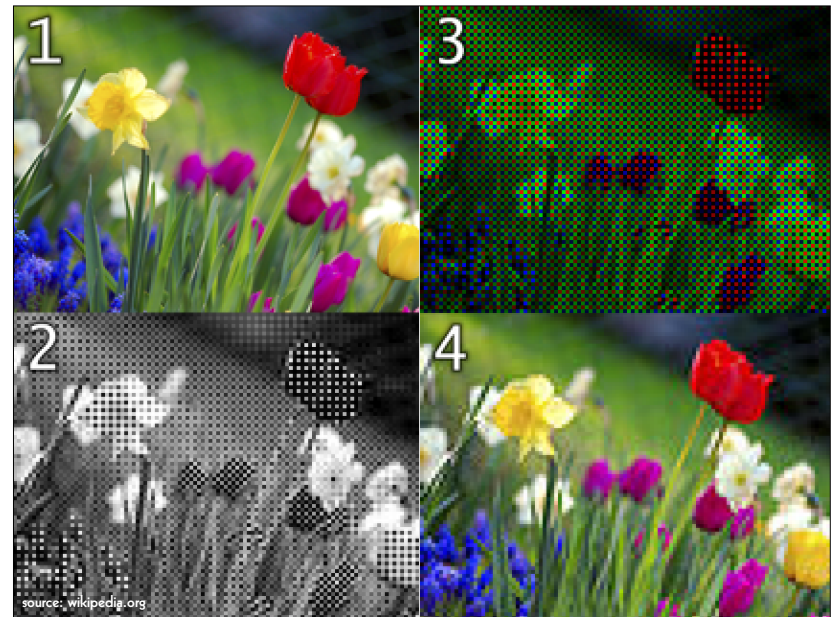


42

```


0111010100101010100010110101011110
010011010101010101010100001011101010
011101010010101010100010110101011110
0001110101010101010100001011101010
0110101010101010100010111010101111
00101010101010101000101110101010000
011101010010101010100010110101011110
010101010101010101000010111010100110
100101110101001010101000101101010101
1110010101010101010000101110101010
011101010010101010100010110101011110
010101010101010101001101010100000001
0010100010101010101001010101010101

```


43

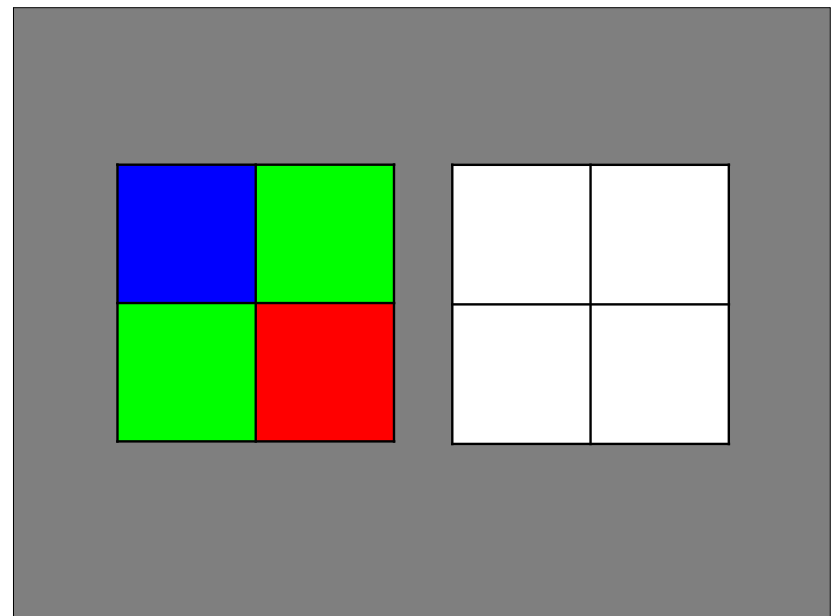


44

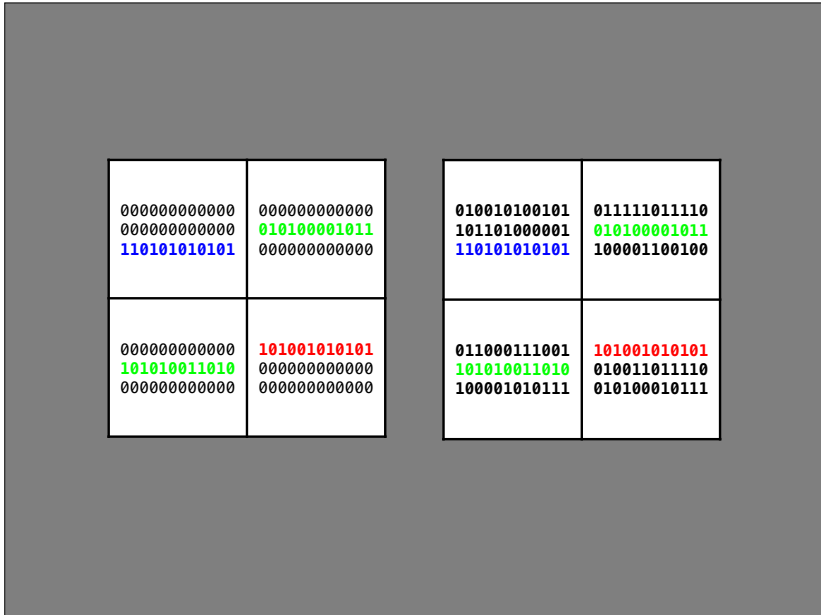


45

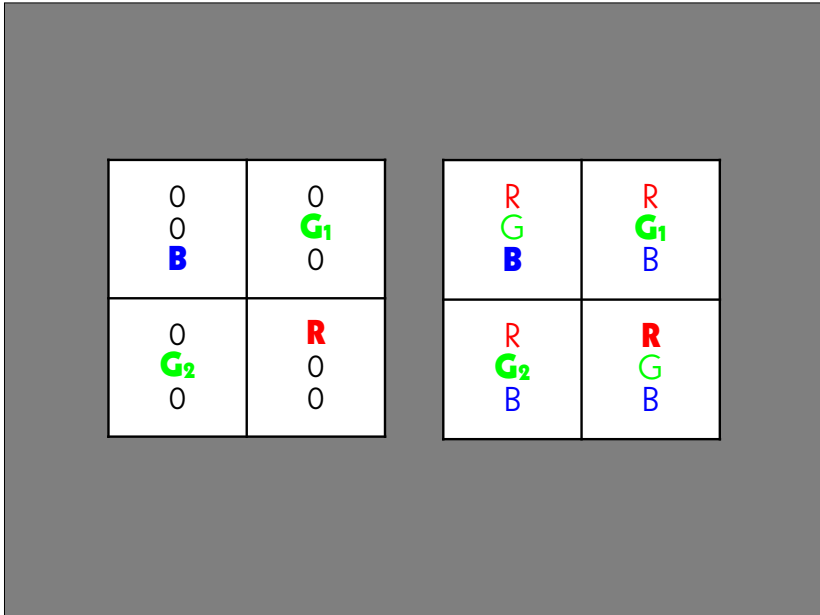


46

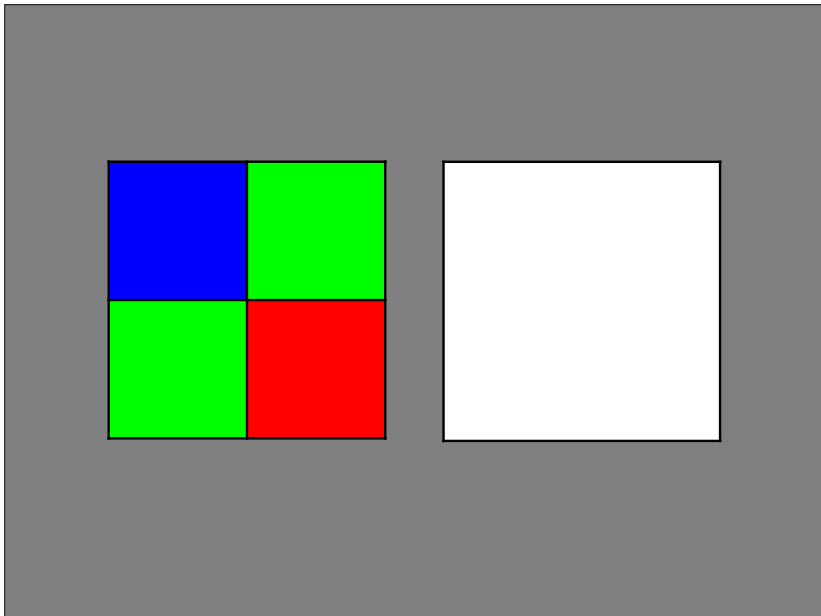

47

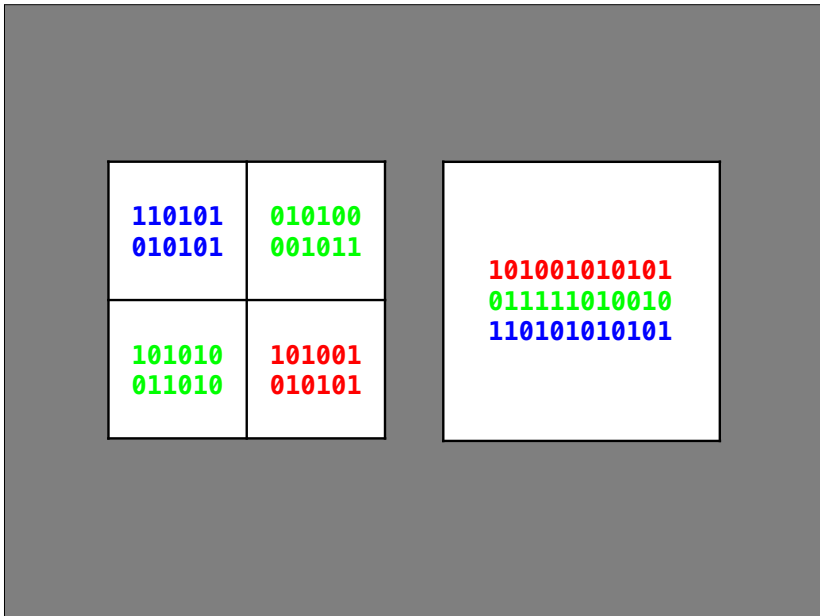

48

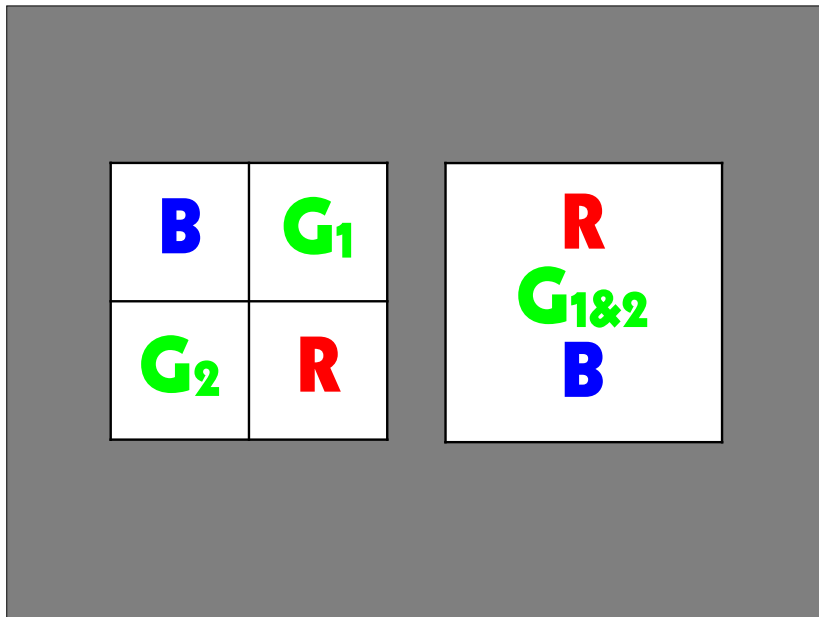

49

Bayer-Daten benützen


digitales Aufblasen auf RGB

- die generierten Daten werden verdreifacht
- die Datei hat die volle Sensorauflösung
- nur die Hälfte der Daten ist real

digitale Reduktion auf RGB

- drei Viertel der generierten Daten sind gespeichert
- die Datei hat die halbe Sensorauflösung
- die gesamten Daten sind real

50

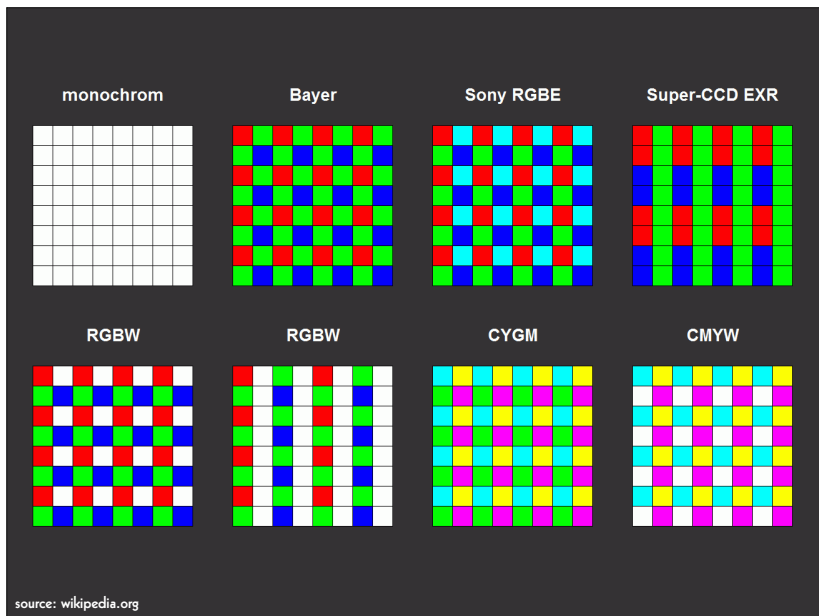

source: wikipedia.org


51

Vorgeschlagene Terminologie


pixel
= picture element

sensel
= sensor element

52

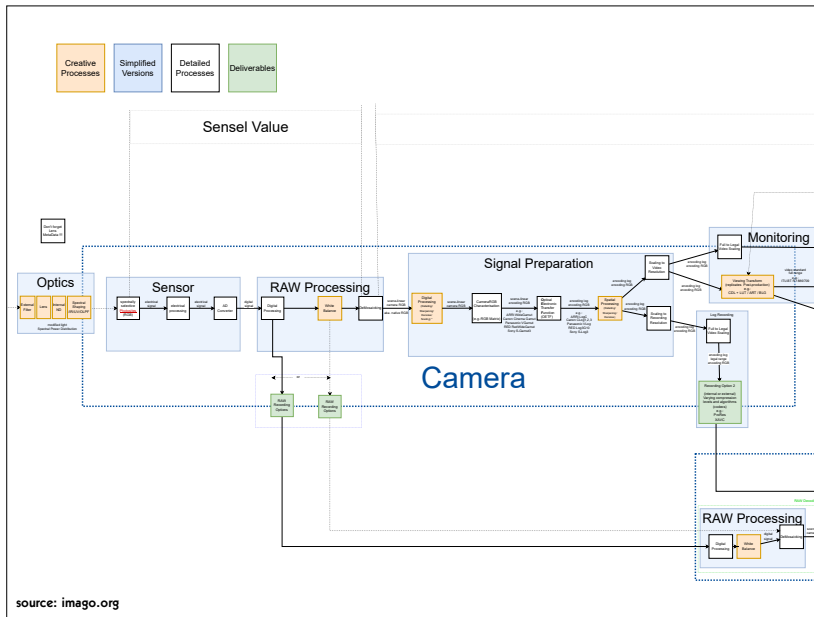

53

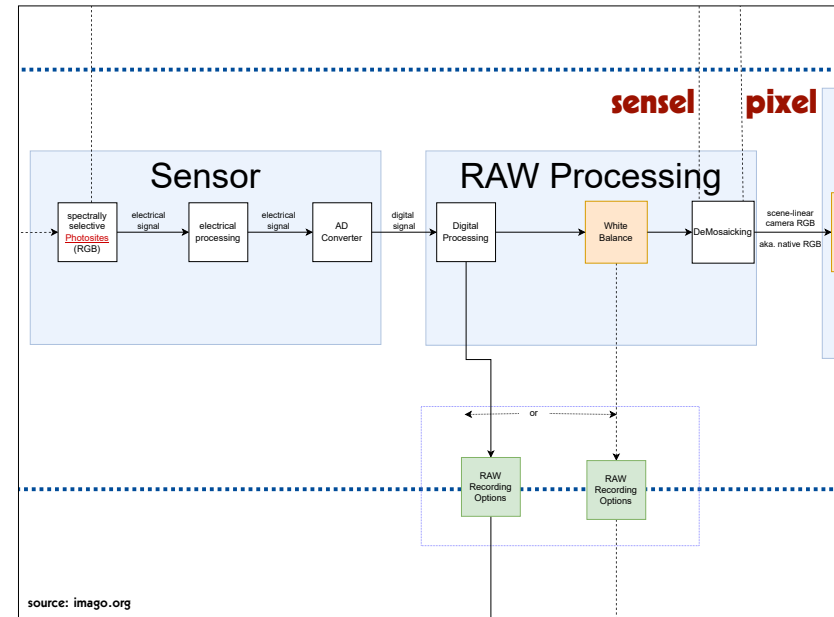

54

Bayer-Daten speichern


- pixel values generated by one de-mosaicking algorithm (digital blow-up)
- pixel values generated by mixing two green sensel values into one (digital reduction)
- raw sensel values

55


Normlicht

- D50
- D55
- D65
- D75


56

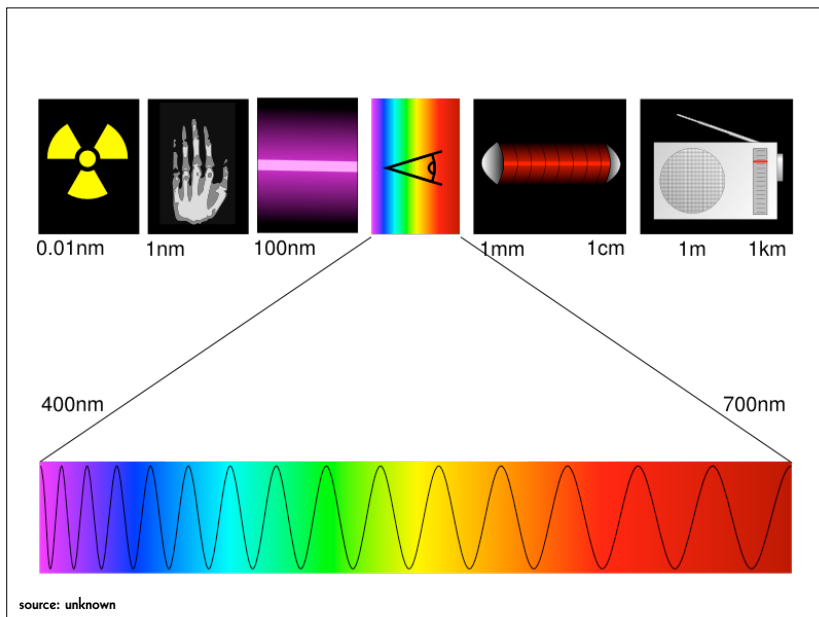


57

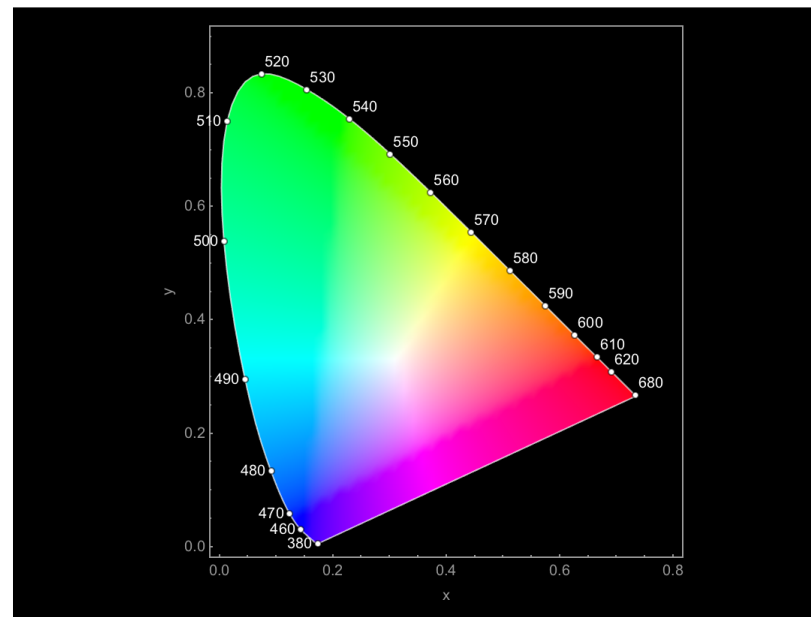

58

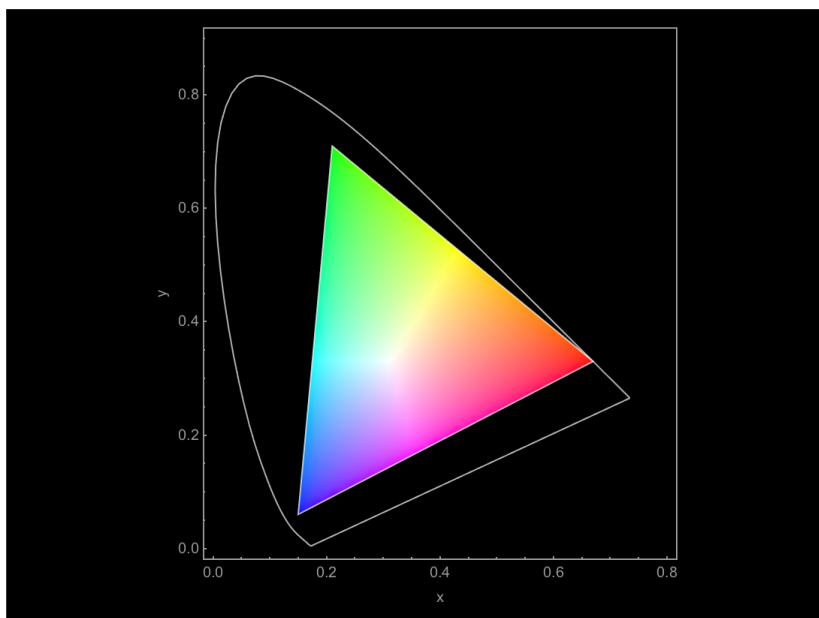

59

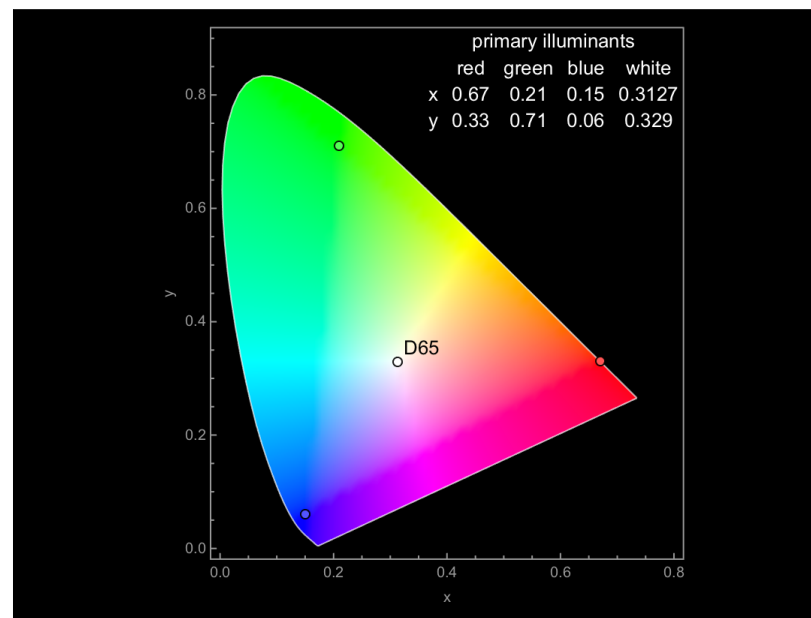


60

Dateiaufbau

61

Dateiaufbau

Container (Wrapper)

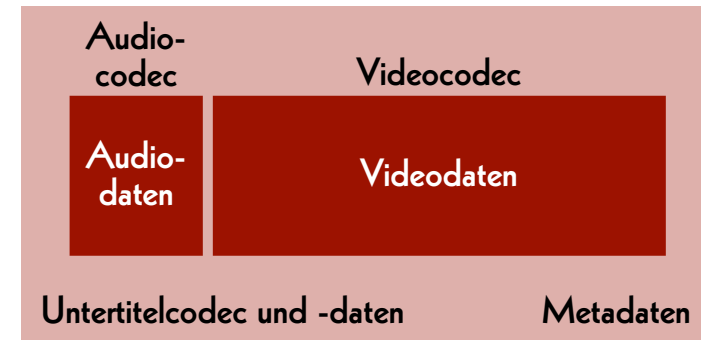

62

Container für Datenfluss

- MP4
- QuickTime (.mov)
- AVI
- Flash
- MXF
- Matroska (.mkv)

63

Container für Einzelbilder

- Ordner
- TAR
- ZIP
- MXF
- Matroska (.mkv)
- CinemaDNG
- Motion JPEG

64

Audiocodec

- WAVE
- BWF
- AAC
- MP3
- FLAC

65

Videocodec (Master)

Einzelbilder

- TIFF
- DPX
- JPEG 2000
- OpenEXR
- DNG

Datenfluss

- Y'CbCr 8 bit
- Y'CbCr 10 bit
- HuffYUV
- FFV1

66

Videocodec (Mezzanine)

- ProRes 422, ProRes 4444, ProRes RAW
- DNxHD, DNxHR
- CineForm RAW
- Blackmagic RAW

67

Videocodec (Zugang)

- H.264 (AVC)
- H.265 (HEVC)
- H.266 (VVC)

- AV1

68

RAW data are cooked.

69

Audiodaten

- pcm_s16le
- pcm_s24le
- pcm_s32le

70

Videodaten

- rgb48le
- rgb24
- rgb72le
- bayer_bggr16le
- bayer_bggr24le
- yuv444p16le
- yuv422p10le
- uyvy422
- yuv420p
- yuv444p24le

71

What is inside my DPX?

- log neg encoding
- log RGB encoding or quasi-log encoding
- gamma encoding or power function encoding
- scene-linear encoding

72

Dateiformate

73

Grundsätze

- **Ein Archiv muss seine Dateien pflegen und handhaben können.**
- Open Source
- einfache Bedienung und ausführliche Dokumentation
- weite Verbreitung

74

Formate für verschiedene Anwendungszwecke

Archivmasterformat

→ zur Erhaltung und Archivierung

Mezzanine-Format

→ zur Bearbeitung und Postproduktion

Distributionsformat

→ zur Verbreitung und Zugänglichmachung

75

Elena Rossi-Snook:

**Archiving without access
isn't preservation,
it's hoarding.**

76

Archivmaster (heute)

Einzelbilder («Film»)

- Ordner, TIFF, 2K oder 4K, RGB, 16 bit
- MXF, DPX, 2K oder 4K, R'G'B', 10 bit

Datenfluss («Video»)

- AVI, «raw», HD, Y'CbCr 4:2:2, 10 bit
- Matroska, FFV1, HD, Y'CbCr 4:2:2, 10 bit

Ton

- BWF, 96 kHz, 24 bit
- FLAC, 96 kHz, 24 bit

77

Mezzanine (heute)

Bild

- ProRes 4444, 2K
- DNxHR, 2K
- ProRes 422 HQ, HD
- DNxHD 175x, HD

Ton

- BWF, 48 kHz, 24 bit
- WAVE, 48 kHz, 24 bit

78

Zugang (heute)

MP4

Bild

- H.264, SD, Y'CbCr 4:2:0, 8 bit, lossy
- H.264, «HD», Y'CbCr 4:2:0, 8 bit, lossy

Ton

- AAC, 44.1 kHz, 16 bit
- AAC, 48 kHz, 16 bit

79

Archivmaster und Mezzanine

Einzelbilder («Film»)

- Matroska, FFV1, 4K oder 2K, RGB, 16 bit
- Matroska, FFV1, 4K oder 2K, R'G'B', 12 bit

Datenfluss («Video»)

- Matroska, FFV1, «HD», Y'CbCr 4:4:4, 10 bit
- Matroska, FFV1, «HD», Y'CbCr 4:4:4, 12 bit

Ton

- Matroska, FLAC, 192 kHz, 24 bit

80

Zugang

MP4

Bild

- H.265, «HD», Y'CbCr 4:2:0, 8 bit, lossy
- H.266, «HD», Y'CbCr 4:2:0, 8 bit, lossy
- AV1, «HD», Y'CbCr 4:2:0, 8 bit, lossy

Ton

- AAC, 48 kHz, 16 bit
- AAC, 96 kHz, 16 bit

81

Bibliografie

Reto Kromer: **Matroska and FFV1: One File Format for Film and Video Archiving?**, in «Journal of Film Preservation», Nr. 96 (April 2017), FIAF, Brüssel, Belgien, S. 41–45

→ https://retokromer.ch/publications/JFP_96.html

82

Vor- und Nachteile

83

Container:

- Ordner
- TAR
- ZIP
- MXF
- Matroska
- AXF

Codec:

- TIFF
- DPX
- JPEG 2000
- FFV1
- OpenEXR
- CineForm RAW
- ProRes RAW
- Blackmagic RAW

84

	Vorteile	Nachteile
TIFF DPX OpenEXR	Daten leichter zu bearbeiten	grössere Dateien
JPEG 2000 FFV1	kleinere Dateien	Daten komplexer zu bearbeiten

85

Eine Brücke zwischen den zwei Welten

RAWcooked (CLI)

→ mediaarea.net/RAWcooked

```
# to encode:
rawcooked input_path_of_folder
# to decode:
rawcooked rawcooked_input_file.mkv
# to get help:
rawcooked -h
man rawcooked
```

86

RAWcooked

- encoding into Matroska (.mkv) using FFV1 video codec and FLAC audio codec
- all metadata preserved
- significantly fewer files
- decoding with bit-by-bit reversibility
- possibility to embed sidecar files (e.g. MD5, LUT, XML)
- compatibility with media players

87

MXF-Container (.mxf)

Videocodec

- DPX
- JPEG 2000
- DNxHD, DNxHR
- ProRes 422, ProRes 4444

88

**SMPTE REGISTERED
DISCLOSURE DOCUMENT**



**MXF Archive and Preservation
Format Registered Disclosure
Document**

Page 1 of 113

The attached document is a Registered Disclosure Document prepared by the sponsor identified below. It has been examined by the appropriate SMPTE Technology Committee and is believed to contain adequate information to satisfy the objectives defined in the Scope, and to be technically consistent.

This document is NOT a Standard, Recommended Practice or Engineering Guideline, and does NOT imply a finding or representation of the Society.

Every attempt has been made to ensure that the information contained in this document is accurate. Errors in this document should be reported to the proponent identified below, with a copy to eng@smpte.org.

All other inquiries in respect of this document, including inquiries as to intellectual property requirements that may be attached to use of the disclosed technology, should be addressed to the proponent identified below.

Proponent Contact Information:

Kate Murray
Library of Congress
101 Independence Ave, S.E.
Washington, DC 20540-1300

Email: kmur@loc.gov

89

MXF / DPX

MXF

→ SMPTE RDD 48:2018

DPX

→ SMPTE ST 268M:2015

90

MXF / JPEG 2000

MXF

→ SMPTE RDD 48:2018

JPEG 2000

→ ISO/IEC 15444-1:2019

→ usw.

91

MXF / DN_x

MXF

→ SMPTE RDD 48:2018

DN_xHD, DN_xHR

→ nicht veröffentlicht

92

MXF / ProRes

MXF

→ SMPTE RDD 48:2018

ProRes 422, ProRes 4444


→ SMPTE RDD 36:2015

93

SMPTE RDD 36:2015

**SMPTE REGISTERED
DISCLOSURE DOCUMENT**

Apple ProRes Bitstream Syntax
and Decoding Process



Page 1 of 39 pages

The attached document is a Registered Disclosure Document prepared by the sponsor identified below. It has been examined by the appropriate SMPTE Technology Committee and is believed to contain adequate information to satisfy the objectives defined in the Scope, and to be technically consistent.

This document is NOT a Standard, Recommended Practice or Engineering Guideline, and does NOT imply a finding or representation of the Society.

Every attempt has been made to ensure that the information contained in this document is accurate. Errors in this document should be reported to the proponent identified below, with a copy to eng@smpte.org.

All other inquiries in respect of this document, including inquiries as to intellectual property requirements that may be attached to use of the disclosed technology, should be addressed to the proponent identified below.

Proponent contact information:

ProRes Program Office
Apple Inc.
1 Infinite Loop, MS: 77-2YAK
Cupertino, CA 95014
USA
Email: ProRes@apple.com

94

Matroska-Container (.mkv)

Videocodec

- FFV1
- ProRes 422, ProRes 4444

95

Matroska / FFV1

Matroska (.mkv)

→ IETF Internet Draft

FFV1

→ IETF RFC 9043

96

Stream: Internet Engineering Task Force (IETF)
RFC: 9043
Category: Informational
Published: August 2021
ISSN: 2070-1721
Authors: M. Niedermayer D. Rice J. Martinez

RFC 9043 FFV1 Video Coding Format Versions 0, 1, and 3

Abstract

This document defines FFV1, a lossless, intra-frame video encoding format. FFV1 is designed to efficiently compress video data in a variety of pixel formats. Compared to uncompressed video, FFV1 offers storage compression, frame fixity, and self-description, which makes FFV1 useful as a preservation or intermediate video format.

Status of This Memo

This document is not an Internet Standards Track specification; it is published for informational purposes.

This document is a product of the Internet Engineering Task Force (IETF). It represents the consensus of the IETF community. It has received public review and has been approved for publication by the Internet Engineering Steering Group (IESG). Not all documents approved by the IESG are candidates for any level of Internet Standard; see Section 2 of RFC 7841.

Information about the current status of this document, any errata, and how to provide feedback on it may be obtained at <https://www.rfc-editor.org/info/rfc9043>.

97

Matroska / ProRes

Matroska (.mkv)

→ IETF Internet Draft

ProRes 422, ProRes 4444

→ SMPTE RDD 36:2015

98

OpenEXR-Dateiformat (.exr)

OpenEXR


→ 3-Klausel-BSD-Lizenz

→ nicht normiert

99

Umwandlungen

100

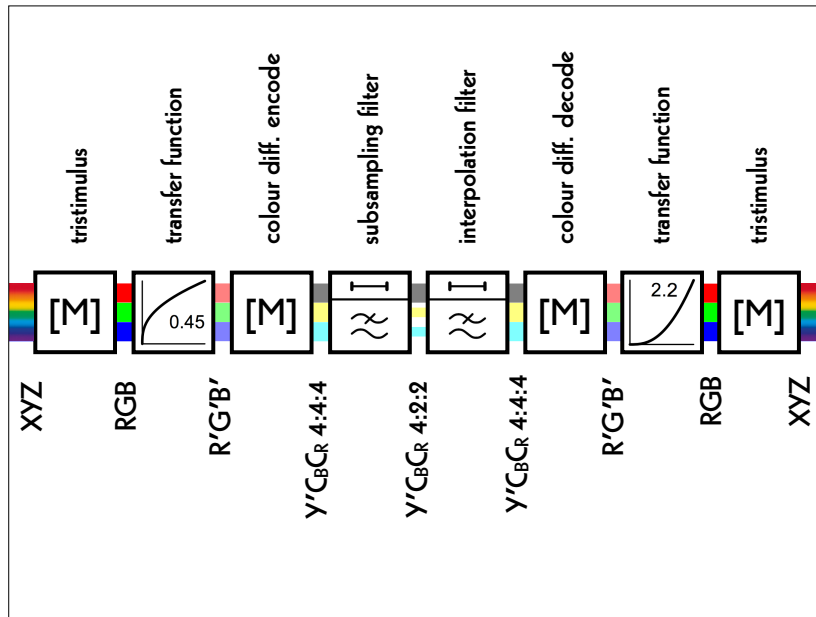


101

Dateiumwandlungen




102

Beispiel: Ton

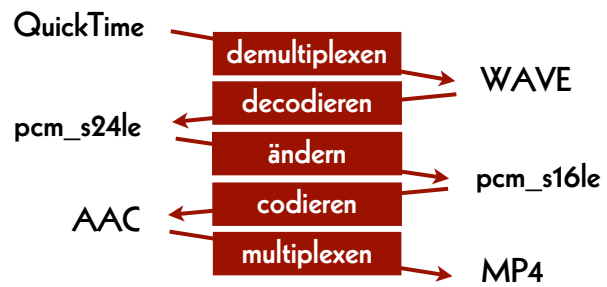


103

Beispiel: Bild

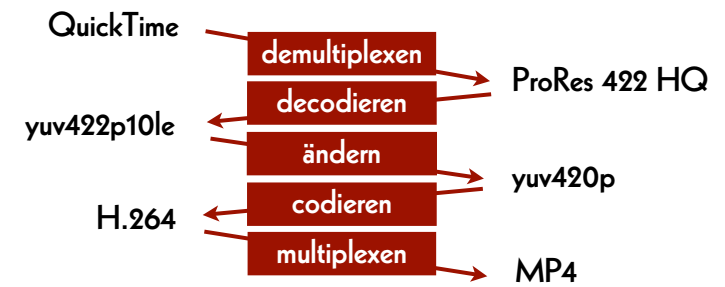

104

Beispiel: Bild und Ton

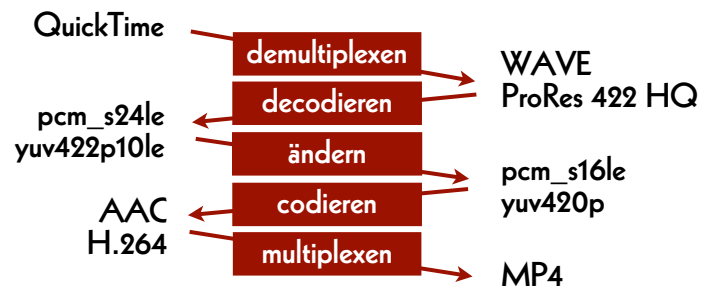

105

Danksagung (1)

- Eidgenössische Technische Hochschule
- Massachusetts Institute of Technology
- Kinemathek Lichtspiel, Bern

- Charles Poynton
- Dave Rice und Misty De Meo
- Agathe Jarczyk und David Pfluger

106

Danksagung (2)

- Tommy Aschenbach

- Claudio Weidmann
- Jim Lindner
- Carl Eugen Hoyos
- Peter Bubestinger-Steindl
- Jérôme Martinez
- Michael Niedermayer

107

AV Preservation by
reto.ch

Sandrainstrasse 3
3007 Bern
Schweiz

reto.ch
info@reto.ch



108